



Inlet Protection - Type 2

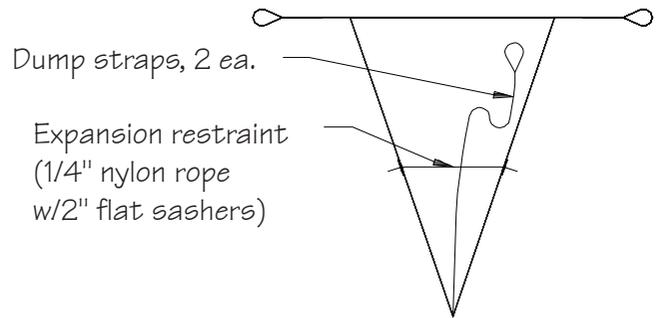

Bag Detail

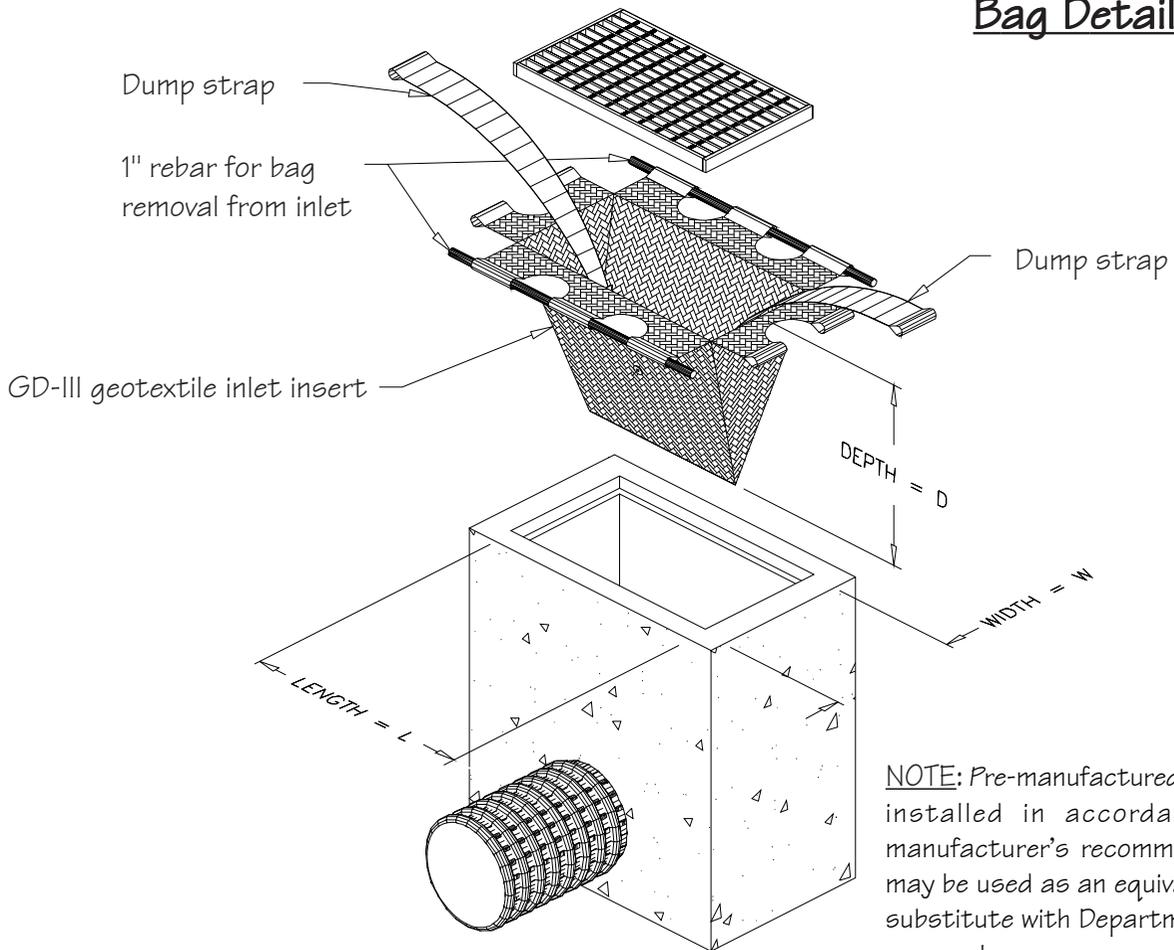

NOTE: Pre-manufactured products installed in accordance with manufacturer's recommendations may be used as an equivalent substitute with Departmental approval.

Perspective

Source:

Adapted from
ACF Products, Inc.

Symbol:




Detail No.

DE-ESC-3.1.5.2

Sheet 1 of 2

Effective FEB 2019



Standard Detail & Specifications

Inlet Protection - Type 2

Notes:

1. This practice shall only be used in situations in which Inlet Protection - Type 1 cannot be used due to site constraints. These include, but are not limited to partially completed parking areas, streets, roads, etc.
2. It may be necessary to transition from Type 1 to Type 2 Inlet Protection as construction proceeds.
3. For areas where there is a concern for oil run-off or spills, insert shall meet one of the above specifications with an oil-absorbant pillow or shall be made completely from an oil-absorbant material with a woven pillow.

Materials:

The geotextile inlet insert shall meet or exceed the specifications of Type GD-III geotextile in accordance with Appendix A-3 of the Delaware Erosion & Sediment Control Handbook.

Source:

Adapted from
ACF Products, Inc.

Symbol:



Detail No.

DE-ESC-3.1.5.2

Sheet 2 of 2

Effective FEB 2019